


Application



AquaTight® EX® Universal compression connectors ensure proper port sealing every time

AquaTight® EX® Compression Connectors: Series 6 & 59

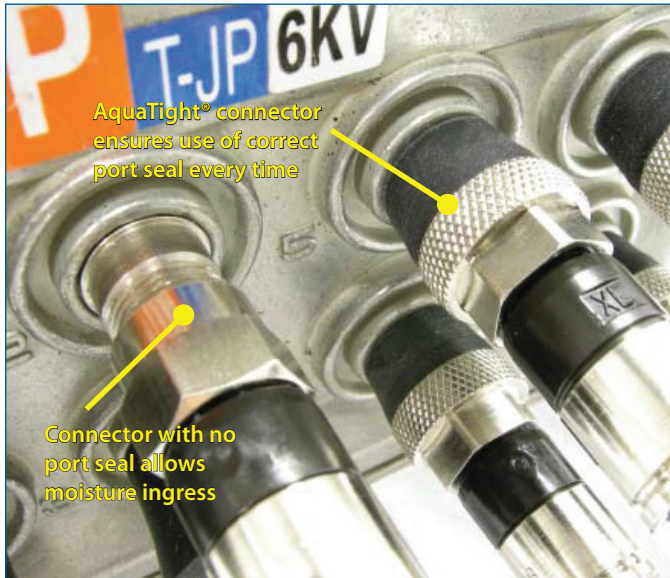

Part Numbers

EX6WS	AquaTight® EX® connector, integrated port seal, series 6 cable
EX6XLWS	AquaTight® EX® connector, integrated port seal, extended body, series 6 cable
EX59WS	AquaTight® EX® connector, integrated port seal, series 59 cable
EX59XLWS	AquaTight® EX® connector, integrated port seal, extended body, series 59 cable



Preparation & Installation Tools

Compression Tool	CATAS, VT200 (for use w/ XL series)		
	CAT-AS-EX, VT300 (for use w/ EX series)		
¼" – ¾" universal drop cable preparation tool	LDT596-250	DDT59611	
7/16" snap torque wrench	TW207	TW307	TW307 AH

Please see complete tool list on pages A38-A40

AquaTight® EX® Compression Connectors Series 7 & 11

PPC's revolutionary AquaTight® integrated port seal technology has now been expanded across the entire EX® Series product line! This design concept combines an EX® compression connector with an integrated port seal and guarantees the use of a port seal every time to eliminate moisture migration problems.

The unique patented design of the EX® body achieves true universality on 60% through Quad Shield, PE, and PVC jacket.



Specifications	
Bandwidth	0 MHz to 3 GHz
Impedance	75 Ohms (nominal)
Return Loss	Minimum -30 dB to 3 GHz
Insertion Loss	Less than .10 dB to 3 GHz
Operating Voltage	90 V (at 60 Hz continuous AC)
Operating Temperature	-40° F to + 140° F (-40° C to 60° C)
Cable Retention	45 lbs (20.41 kg) minimum

Meets or Exceeds all SCTE Specifications

Features & Benefits

