

CL1000

Slideaway™ LCD Console


The CL1000 is a KVM console module that serves as the front-end for standard KVM switches. The CL1000 features an integrated 17" LCD panel, full keyboard, and touchpad in a 1U, rack-mountable, Slideaway™ housing. Users who already have a switch can take advantage of the space saving and efficiency benefits of the CL1000 LCD KVM console without the unnecessary expense of having to purchase a KVM switch .



Rack Mount Kit	Depth (cm)
Long(Optional)	68 - 100
Short (Standard)	42 - 72

Easy Installation Rack Mount Kit	Depth (cm)
Long(Optional)	68 - 105
Short(Optional)	42 - 70

Setup

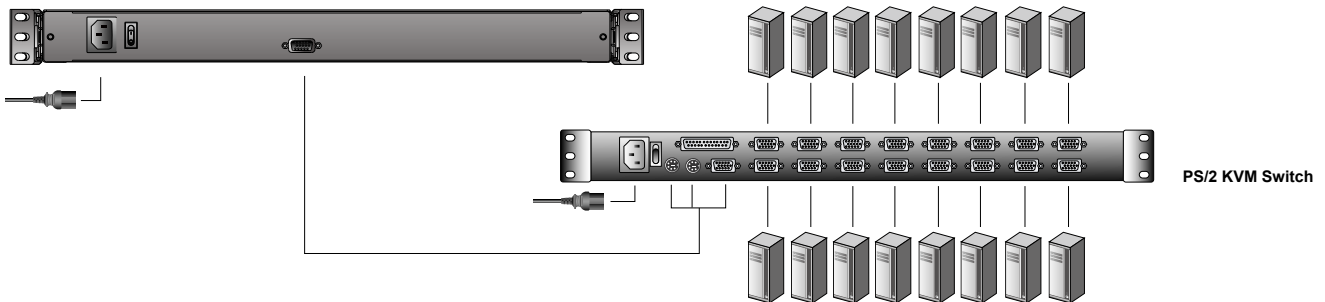

Features

- Integrated KVM console with 17" LCD monitor – in a Slideaway™ housing
- LCD module rotates up to 115 degrees for a more comfortable viewing angle
- Slideaway™ housing is less than 1U – with top and bottom clearance for smooth operation in a 1U high system rack
- Compatible with most PS/2 KVM Switches
- Internal power built in
- Adjustable depth to fit within a rack
- High video resolution:
Up to 1280 x 1024 @75Hz
Supports DDC, DDC2, DDC2B
- DDC emulation – VGA settings of every connected computer are automatically adjusted for optimal output to the LCD monitor
- Keyboard Language support: English(US); English(UK); German; German(Swiss); French; Spanish; Traditional Chinese; Japanese; Korean; Swedish; Italian; Russian; Hungarian
- Improved design – single person installation (optional)

Specifications

Function		CL1000
Connectors	KVM Ports	1 x SPHD Female (Yellow)
	Power	1 x 3-prong AC Socket
Switches	LCD Adjustment	4 x Pushbuttons
	Reset	1 x Semi-recessed Pushbutton
	Power	1 x Rocker
LEDs	Power	1 (Dark Green)
	Num Lock	1 (Green)
	Caps Lock	1 (Green)
	Scroll Lock	1 (Green)
Emulation	Keyboard / Mouse	PS/2
Video	17" LCD	1280 x 1024; DDC2B
I/P Rating		100 - 240 VAC; 50/60 Hz; 1A
Power Consumption	17" LCD	120V, 27W / 230V, 35W
Environment	Operating Temp.	0-40°C
	Storage Temp.	-20-60°C
	Humidity	0-90% RH, Non-condensing
Physical Properties	Housing	Metal+Plastic
	Weight	12.30 kg
	Dimensions (D x W x H)	53.40 x 48.00 x 4.40 cm (19"/1U)

* The specifications and pictures are subject to change without notice.