


Structure Of Cable

Wiring Diagram

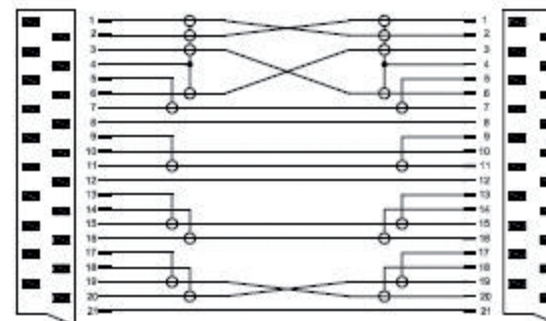

**FEATURES**

- 1. Gold-plated plugs
- 2. Zn alloy shinning Chromium-plated housings
- 3. ROHS compliant.

**ELECTRICAL SPECIFICATION:**

- 1. Withstanding voltage: 500VDC 1MIN
- 2. Insulation Resistance: 50Mohm 500VDC

					DES.		MTL.		MDL.	
5		screw, black	4PCS		CHK.		TRL.		PDT.	SCART to SCART PLUG CABLE(METAL SHELL with PET mesh )
4		Nylon sleeve	1PCS	PET	APPR.		QTY.	VER.	TIT.	
3		cable	1PCS	JACKET silver				SCL.	Title.	
2		24k gold plated pln	2PCS					A-1		
1		Black Chrome-plated metal shell	2SET							
ITEM.	DWG NO.	DESCRIPTIONS & SPECIFICATIONS	QTY.	REMARK	Unit: MM		Page 1	Pages 1	Drw. NO.	